
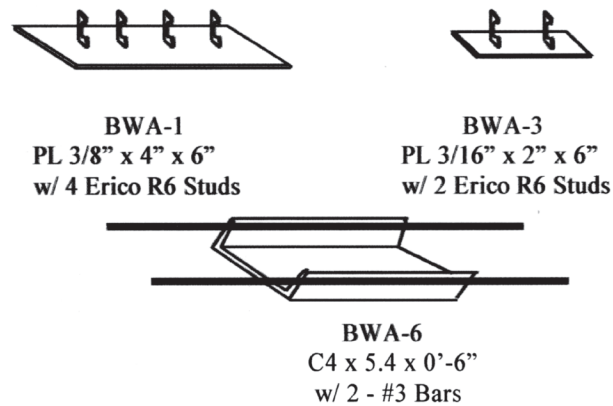


## BASE CONNECTION DESIGN FOR SPANCRETE® HOLLOWCORE WALL PANELS

Spancrete hollowcore wall panels used in a vertical orientation require connections to the foundation. These connections may be subjected to normal forces due to wind load and eccentric axial load, or uplift and in-plane forces if acting as a shear wall. Where applicable, the base connections may also have to satisfy the structural integrity provisions of AC1 318.

Spancrete wall panels are typically welded to a continuous or spaced clip angle that has been welded or properly bolted to the foundation. The SMA has tested a number of weld anchor assemblies for use as the panel weld anchor in such a base detail. Three are shown below, with their test capacities.

Insert	$V_{n1}$	$V_{n2}$	$P_n$
BWA-1	15.17k	5.62k	3.30k
BWA-3	9.31k	4.66k	2.52k
BWA-6	31.04k	13.0k	5.34k

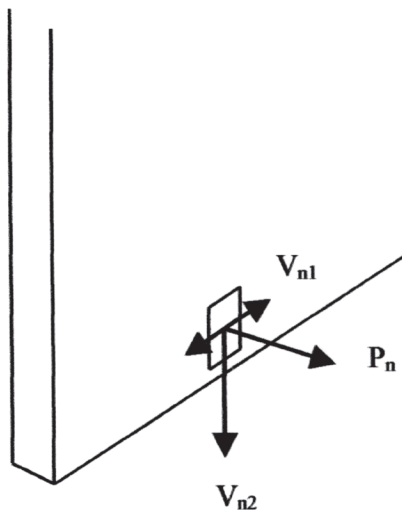

It is recommended that a strength reduction factor of 0.70 and an additional connection load factor of 1.3 be used with these test values.

*A design example is given on the reverse side.*

Research Notes are produced periodically by the SMA Technical Committee. SMA Research Notes are based on testing done for the Spancrete Manufacturers Association. The information contained in these Research Notes should be used by those experienced in structural design and should not replace sound engineering judgment.

## BASE CONNECTION DESIGN FOR SPANCRETE® HOLLOWCORE WALL PANELS

### GIVEN:

Wind normal to panel = .9 k per connection  
 Uplift due to in-plane wind = 4.2 k per connection  
 Shear due to in-plane wind = 1.31 k per connection

### PROBLEM:

Select a panel anchor for the base detail shown to resist the loads given.

### SOLUTION:

For in-plane wind uplift, the factored force is  $V_u = 1.6(4.2) = 6.72$  k  
 Applying the PCI recommended connection factor,  $V_u = 1.3(6.72) = 8.74$  k  
 From the table on the other side, select a BWA-6,  $\phi V_{n2} = 0.7(13) = 9.1$  k  
 Check in-plane shear capacity for BWA-6:  $V_u = 1.6(1.31) = 2.10$  k  
 Applying the recommended connection factor

$$V_u = 1.3(2.10) = 2.73 \text{ k} \quad [ < \phi V_n = 0.7(31.04) = 21.73 \text{ k} \quad \text{OK}]$$

$$\text{Check normal wind on BWA-6: } P_u = 1.6(.9) = 1.44 \text{ k}$$


With the connection factor:

$$P_u = 1.3(1.44) = 1.87 \text{ k} \quad [ < \phi P_n = 0.7(5.34) = 3.74 \text{ k} \quad \text{OK}]$$

### Conclusion:

Use BWA-6 for the panel weld anchor.

(Note that the BWA-6 anchor has sufficient capacity for the ACI 10 kip structural integrity connection, if required.)



**Note:** Sample calculations are intended to illustrate the concept presented and do not represent all considerations necessary for the complete design.

#### MIDWEST

Hanson Structural  
 Precast Midwest, Inc.  
 Maple Grove, Minnesota

Spancrete, Inc.  
 Green Bay, Wisconsin

Spancrete Industries, Inc.  
 Waukesha, Wisconsin

Spancrete of Illinois, Inc.  
 Arlington Heights, Illinois

Wells Concrete  
 Wells, Minnesota

#### WEST

Hanson Structural  
 Precast Pacific, Inc.  
 Irwindale, California

#### KIE-CON

Division of Kiewit Pacific Co.  
 Anitoch, California

Owell Precast  
 Sandy, Utah

#### SOUTHWEST

Manco Structures, Ltd.  
 Schertz, Texas

#### SOUTH

Cement Industries, Inc.  
 Fort Myers, Florida

Florida Precast Industries, Inc.  
 Sebring, Florida

#### EAST

Mid-Atlantic Precast, LLC.  
 King George, Virginia

#### EGYPT

Samcrete Egypt  
 Ahram, Giza

#### MEXICO

ITISA  
 Mexico City, Mexico

Spancrete Noreste  
 Monterrey, Mexico

#### CROATIA

Mucic & Co  
 Dugopolje, Croatia

#### CARIBBEAN

Preconco Limited  
 Barbados, West Indies

#### TURKEY

Yapi-Merkezi  
 Camlica-Istanbul, Turkey

#### UAE

Hi-Tech Concrete  
 Products LLC  
 Abu Dhabi, UAE

#### MACHINE

MANUFACTURER  
 Spancrete Machinery  
 Corporation

N16 W23415 Stoneridge Drive  
 Waukesha, WI 53188  
 Telephone: 414-290-9000  
 Fax: 414-290-9130  
[www.spancrete-machinery.com](http://www.spancrete-machinery.com)

#### SPANCRETE IS ALSO MANUFACTURED IN:

Armenia	Ireland
China	Japan
Denmark	Russia
Guatemala	South Korea
Hungary	Switzerland

Spancrete® hollowcore is a registered trademark